

ALL IN ONE SWITCH TILT LED DOWNLIGHT

8W
-
10W

The first ever Switchable Wattage downlight with front-facing switch!



SWITCHABLE
WATTAGE



FIRE RATED
BS476-21

30/60/90
minutes



IP65
RATED

With Bezel



76
mm

DIAMETER
CUT OUT



FEATURES:

- The first ever Switchable Wattage downlight with front-facing switch!
- Switchable colour temperature after installation with front-facing switch
- Tilt angle of 25° for directional light
- IP65 Rated with bezel
- Fire-Rated to BS476-21 30/60/90 minutes
- Plug 'n' Play GST18 Connector as standard
- 3 bezel options for multiple design options included in box; White, Brushed Steel and Polished Chrome

APPLICATIONS



BATH &
SHOWER



COMMERCIAL



EDUCATION



HOME &
RESIDENTIAL



LOBBIES &
CORRIDORS



OFFICES




RETAIL

8W
-
10W

ALL IN ONE SWITCH TILT LED DOWNLIGHT

The first ever Switchable Wattage downlight with front-facing switch!

ITEM #	230489
PRODUCT NAME	All In One Switch Tilt LED Downlight
WATTAGE	8W/10W
SUPPLY OUTPUT	220-240VAC 50/60Hz
DIMENSIONS	56mm x 100mm x 100mm (excl. driver)
CUTOUT SIZE	76mm Diameter
COLOUR TEMPERATURE	Switchable 3000K/4000K/6000K
COLOUR RENDITION INDEX (CRI)	Ra>80
LUMENS	800 - 880lm (8w) 1000 - 1100lm (10w)
FIRE RATING	BS476-21 30/60/90 min
IP RATING	IP65 (with Bezel)
BEAM ANGLE	60°
CONSTRUCTION	Aluminium / Steel / Polycarbonate
WORKING TEMPERATURE	-30°C to +35°C
LIFETIME	50,000 Hours
SWITCH CYCLES	100,000
CERTIFICATION	CE, UKCA, RoHS Compliant
WARRANTY	1 year(+ 4 years extended warranty with online registration)
UGR RATING	28
IK RATING	IK07
SDCM	4
L VALUE	L70
B VALUE	B50
LED CHIP BRAND	SAN AN

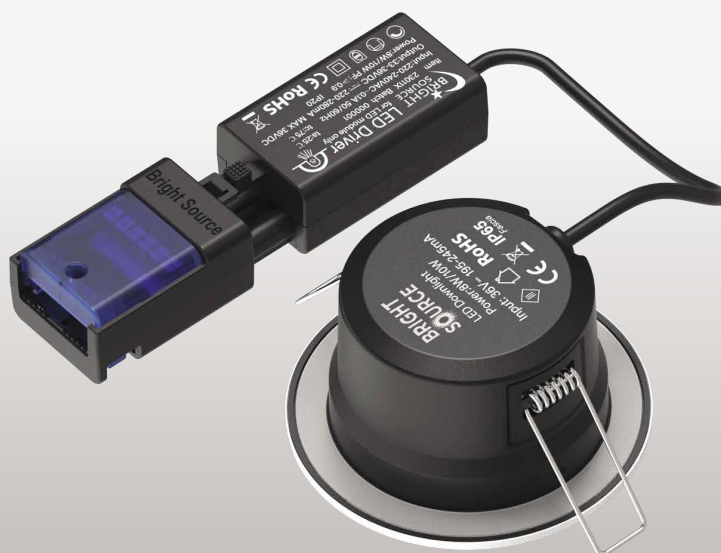

BRIGTH SOURCE



Formerly rated A+
(same quality,
new energy rating
label regulations)

