

BRIGTH SOURCE

ALL IN ONE LED DOWNLIGHT

8W

New All in One downlight with easy fit Plug'n'Play connector


Energy efficient LED illumination for all settings with a driver on a flexible connection, great for tight spaces.




2 Bezels Included as Standard

Brushed Steel | White

5 additional bezel finishes are available:



ANTIQUÉ BRASS
[230281]



BRASS
[230274]



POLISHED CHROME
[230304]



BLACK
[230267]



GUNMETAL
[230311]

3 Impressive Features, 1 Amazing Downlight

1. Dimmable
2. Fire-Resistant 30/60/90 minutes
3. 3-hour emergency version available




MAGNETIC FRONT



FIRE RATED
BS476-21
30/60/90 minutes



IP65 RATED
With Bezel



65 mm
DIAMETER CUT OUT

FEATURES:

- New 8W downlight added to the range
- Plug'n'Play as standard (GST18 Connector)
- 3 CCT - Discreet colour temperature changing switch, changable after installation
- 2 bezels included as standard - Brushed steel and white
- Easy to install in 65mm cut out
- Switch the bezels after installation
- Trusted, stylish design from the All in One range which includes the Tilt 10W and the 10W fire-rated downlights



APPLICATIONS



BATH & SHOWER



COMMERCIAL



EDUCATION



HOME & RESIDENTIAL



LOBBIES & CORRIDORS



OFFICES



RETAIL


8W

ALL IN ONE LED DOWNLIGHT

New insulation cover with easy fit Plug'n'Play connector

Part No.	230472
DESCRIPTION	8W All in One Downlight
DIMENSIONS	53 x 82 x 82mm (Excluding driver)
CUT OUT	65mm diameter
POWER CONSUMPTION	8W
POWER FACTOR	0.9
COLOUR	3000K (Warm White) / 4000K (Cool White) / 6000K (Daylight White)
LAMP TYPE	COB
COLOUR RENDITION (CRI)	Ra>80
LUMINENCE FLUX	598lm (WW) / 680lm (CW) / 635lm (DW)
IP RATING	IP65 (Bezel only)
CONSTRUCTION	Aluminum / Steel / Polycarbonate
FIRE RESISTANT	BS476-22 30/60/90 minutes
BEAM ANGLE	70°
DIMMABLE	Yes
EMERGENCY CONVERSION CODE	230120
WORKING TEMPERATURES	-30°C to +35°C
ENERGY CONSUMPTION	10kWh
CERTIFICATION	CE, RoHS
WARRANTY	1 year (+ 2 years extended warranty with online registration)
BUILDING REGS - PART L	Yes

Space Requirements

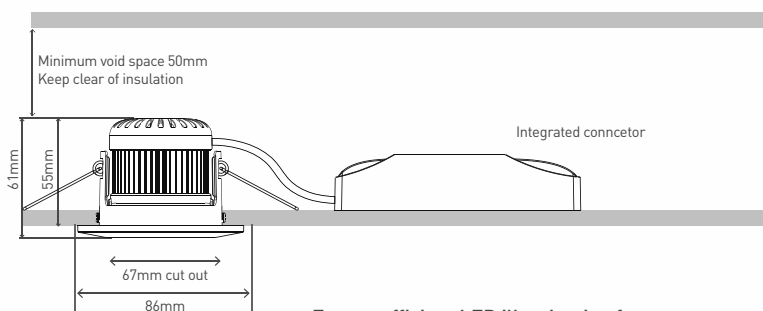

Energy efficient LED illumination for all settings with a driver on a flexible connection, great for tight spaces!




Easily switch the colour temperature after installation

EXCELLENT PERFORMANCE FROM THE **ALL IN ONE** RANGE



BRIGTH SOURCE

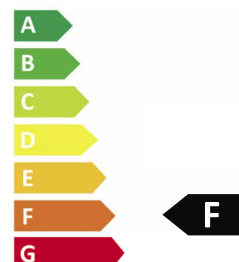

Formerly rated A+ (same quality, new energy rating label regulations)

