


LED LOW BAY

5000K

Consistent Directional Lighting

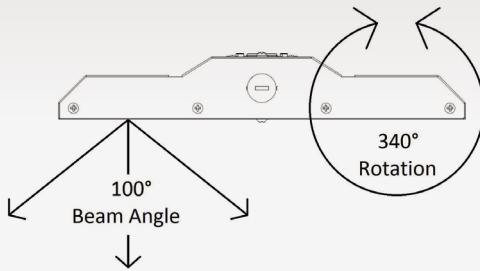

FEATURES:

- Comes with 2 hanging brackets plus 2 x 1m chain with carabiner
- Perfect for warehouses, storage aisles, work areas
- Directional LED lighting to produce a more consistent light
- High lumen output - 135 lm/W
- 1-10V dimmable version available
- Emergency option available with self-test
- Microwave with Daylight Saving sensor and Corridor Function available on request

APPLICATIONS



WAREHOUSE
& STORAGE
AISLES

LED LOW BAY

5000K


Consistent Directional Lighting

Part No.	203001	203018	203032
Part No. Emergency Version	203001-E*	203018-E*	203032E*
DESCRIPTION	90W LED Low Bay	110W LED Low Bay	165W LED Low Bay
DIMENSIONS	600mm x 305mm x 48mm		
POWER INPUT	100-240VAC 50/60Hz		
COLOUR TEMPERATURE	5000K (Daylight)		
LUMENS	12,150lm	14,850lm	22,275lm
COLOUR RENDITION (CRI)	Ra>80		
BEAM ANGLE	100°		
POWER CONSUMPTION	100-240VAC 50/60Hz		
WORKING TEMPERATURES	-40°C to +50°C		
STORAGE TEMPERATURES	-40°C to +40°C		
LIFETIME	50,000 Hours		
CONSTRUCTION	Steel/Polycarbonate Panel		
IP RATING	IP20		
DRIVER	Bright Source		
WARRANTY	1 year (+ 2 years extended warranty with online registration)		
UGR RATING	<26		
IK RATING	IK06		
SDCM	<6		
L VALUE	L70		
B VALUE	L90B10		
LED CHIP BRAND	Lumileds 2835		
Driver Brand	SOSEN		




* Battery warranty for Emergency items valid for 2 years only

20mm knock out holes at side and rear for installation

plus 2 x 1m chain and carabiner

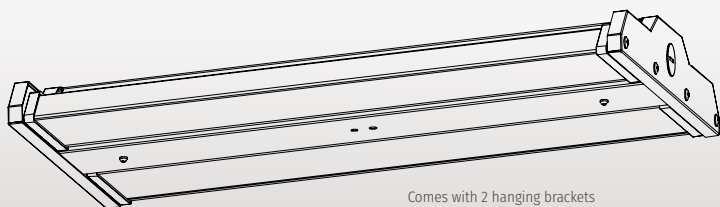

Comes with 2 hanging brackets

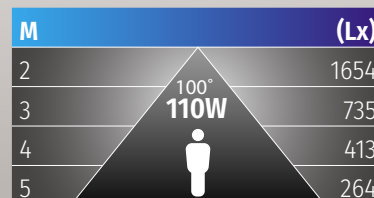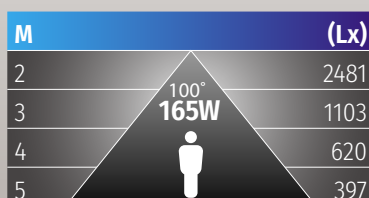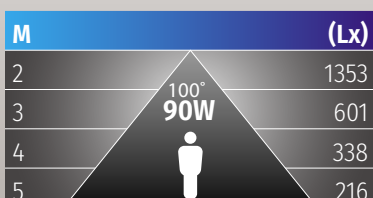

BRIGTH SOURCE



Formerly rated A+ (same quality, new energy rating label regulations)

