

BRIGHT SOURCE

SITE LIGHTING



BRIGHT SOURCE

110V WORKLIGHT

15W

Pre-wired with 3M Three-Core Yellow Cable and Plug & Socket



FEATURES:

- Pre-wired with 3M Three-Core Yellow Cable and Plug & Socket
- IP54 Weather Resistant
- High quality
- Robust durable product
- Additional Tripod (232025); Twin heads support bracket (232032); Hand Held Bracket (232018) available to work alongside this Work Light

APPLICATIONS



CONSTRUCTION



OUTDOOR



WORK SITES

15W

110V WORKLIGHT

Pre-wired with 3M Three-Core Yellow Cable and Plug & Socket

Part No.	232001
DESCRIPTION	110V 15W Work Light re-wired with 3M Three-Core Yellow Cable and Plug & Socket
DIMENSIONS	227mm x 200mm x 56mm
BODY COLOUR	Yellow
POWER CONSUMPTION	15W
POWER INPUT	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT	1500lm
IP RATING	IP54
IK RATING	IK08
BEAM ANGLE	120°
LIFETIME	50,000hrs
SWITCH CYCLES	50,000
CONSTRUCTION	Diecast, PC & Glass
WORKING TEMPERATURE	-20°C to +45°C
CERTIFICATION	UKCA, CE
WARRANTY	1 year (+ 4 year extended warranty with online registration)



ADDITIONAL ACCESSORIES

Part No.	232025
DESCRIPTION	Tripod for use with Work Light (232001)
DIMENSIONS	135mm x 135mm x 780mm




Part No.	232032
DESCRIPTION	Twin Heads Support Bracket for use with Work Light (232001)
DIMENSIONS	550mm x 30mm x 40mm



Part No.	232018
DESCRIPTION	Hand Held Bracket for use with Work Light (232001)
DIMENSIONS	190mm x 185mm x 38mm



BRIGHT SOURCE

**BRIGHT SOURCE**
232001**15**
kWh/1000h

BRIGTH SOURCE

110V GLOBE LIGHT

20W

Pre-wired with 3M Three-Core Yellow Cable and Plug



**5
YEAR
WARRANTY**
WITH ONLINE
REGISTRATION

FEATURES:

- Easy to hold handle for moving light around the site
- Comes with internal socket allowing for multiple 110V lights to be connected up as a circuit
- For use with the Tripod (232025)
- IP54 Weather Resistant
- High Quality
- Robust and Durable Product
- In-built hook on the base to hang the light upside down

APPLICATIONS



CONSTRUCTION



OUTDOOR



WORK SITES

20W

110V GLOBE LIGHT

Pre-wired with 3M Three-Core Yellow Cable and Plug

Part No.	232049
DESCRIPTION	110V Uplight with pre-wired with 3M Three-Core Yellow Cable and Plug
DIMENSIONS	190mm x 190mm x 240mm
BODY COLOUR	Yellow
POWER CONSUMPTION	20W
POWER INPUT	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT/MODES	1800lm
IP RATING	IP54
IK RATING	IK10
CONSTRUCTION	Diecast & PC
WORKING TEMPERATURE	-20°C to +45°C
LIFETIME (HRS)	50,000
SWITCH CYCLES	15,000
CERTIFICATION	UKCA, CE
WARRANTY	1 year (+ 4 year extended warranty with online registration)
EFFICACY RATING	90lm/W



ADDITIONAL ACCESSORIES

Part No.	232025
DESCRIPTION	Tripod for use with Globe Light (232049)
DIMENSIONS	135mm x 135mm x 780mm



BRIGHT SOURCE


**BRIGHT SOURCE**
232049**20**
kWh/1000h

2021 No. 1093

110V FESTOON KIT - 12M

30W

Pre-wired with Two-Core Yellow Cable and Plug



FEATURES:

- High quality, robust and durable product
- Pre-drilled holes for screwing down to the wall or floor
- 20m cable allowing for lights to be placed where required on each site
- IP44 weather resistant
- Pre-wired with two-core yellow cable and plug
- Additional 'S' Hooks available (232186) to hook the individual lights on site
- Additional Splitter Cable (232070) available for joining multiple festoon kits together.

APPLICATIONS



CONSTRUCTION



OUTDOOR



WORK SITES

30W

110V FESTOON KIT - 12M

Pre-wired with Two-Core Yellow Cable and Plug

Part No.	232056
DESCRIPTION	Pre-wired with two core yellow cable and plug
DIMENSIONS	75mm x 75mm x 60mm
BODY COLOUR	Yellow
POWER CONSUMPTION	30W
POWER INPUT VOLTAGE	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT	2,550lm
IP RATING	IP44
IK RATING	IK10
BEAM ANGLE	270°
CONSTRUCTION	Polycarbonate
WORKING TEMPERATURE	-20°C to +45°C
LIFETIME	50,000hrs
SWITCH CYCLES	15,000
WARRANTY	1 year (+ 4 year extended warranty with online registration)
CERTIFICATION	UKCA & CE
EFFICACY RATING	85lm/W



ADDITIONAL ACCESSORIES


Part No.	232186
DESCRIPTION	Metal 's' hooks (10 pack) 100mm
COLOUR	Yellow



Part No.	232070
DESCRIPTION	Splitter Cable for use with Festoon Kits
DIMENSIONS	200mm x 180mm



BRIGHT SOURCE

**BRIGHT SOURCE**
232056**30**
kWh/1000h


2021 No. 1093

110V FESTOON KIT - 20M

50W

Pre-wired with Two-Core Yellow Cable and Plug

10
LIGHTS
PER 20M CABLE



5
YEAR
WARRANTY
WITH ONLINE
REGISTRATION

FEATURES:

- High quality, robust and durable product
- Pre-drilled holes for screwing down to the wall or floor
- 20m cable allowing for lights to be placed where required on each site
- IP44 Weather Resistant
- Pre-wired with two-core yellow cable and plug
- Additional 'S' Hooks available (232186) to hook the individual lights on site
- Additional Splitter Cable (232070) available for joining multiple festoon kits together.

APPLICATIONS



CONSTRUCTION



OUTDOOR



WORK SITES

BRIGTH SOURCE

50W

110V FESTOON KIT - 20M

Pre-wired with Two-Core Yellow Cable and Plug

Part No.	232063
DESCRIPTION	Pre-wired with two core yellow cable and plug.
DIMENSIONS	75mm x 75mm x 60mm
BODY COLOUR	Yellow
POWER CONSUMPTION	50W
INPUT VOLTAGE	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT	4,250lm
IP RATING	IP44
IK RATING	IK10
BEAM ANGLE	270°
WORKING TEMPERATURE	-20°C to +45°C
LIFETIME	50,000hrs
SWITCH CYCLES	15,000
CONSTRUCTION	Polycarbonate
CERTIFICATION	UKCA & CE
WARRANTY	1 year (+ 4 year extended warranty with online registration)
EFFICACY RATING	85lm/W





ADDITIONAL ACCESSORIES

Part No.	232186
DESCRIPTION	Metal 's' hooks (10 pack) 100mm
COLOUR	Yellow



Part No.	232070
DESCRIPTION	Splitter Cable for use with Festoon Kits
DIMENSIONS	200mm x 180mm

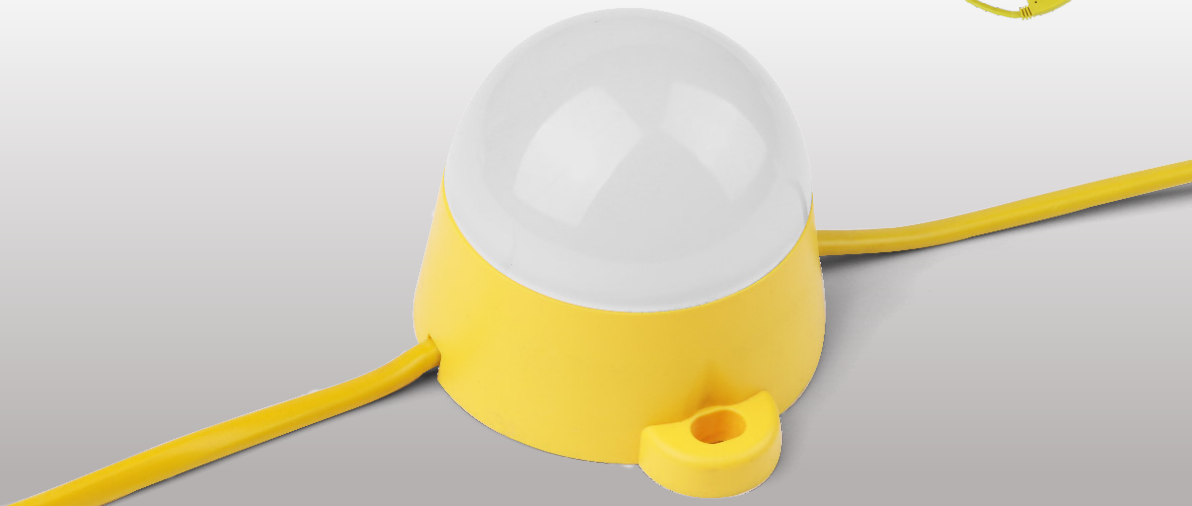**BRIGHT SOURCE****BRIGHT SOURCE**
232063**50**
kWh/1000h

110V UPLIGHT

72W

Pre-wired with 3M Three-Core Yellow Cable and Plug



FEATURES:

- Pre-wired with 3M Three-Core Yellow Cable And Plug & Socket
- Built-in Tripod Base - no need to buy any accessories!
- IP54 weather resistant
- Comes with internal socket allowing for multiple 110V lights to be connected up as a circuit
- High quality
- Robust and durable product

APPLICATIONS



CONSTRUCTION



OUTDOOR



WORK SITES


72W

110V UPLIGHT HEIGHT ADJUSTABLE

Part No.	232087
DESCRIPTION	110V Uplight Pre-wired with 3M Three-Core Yellow Cable and Plug & Socket Tripod Base
DIMENSIONS	1495mm x 280mm x 220mm
BODY COLOUR	Yellow
POWER CONSUMPTION	72W
POWER INPUT	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT/MODES	7200lm
IP RATING	IP54
IK RATING	IK10
BEAM ANGLE	360°
CONSTRUCTION	Polycarbonate
WORKING TEMPERATURE	-20°C to +45°C
LIFETIME (HRS)	50,000hrs
SWITCH CYCLES	15,000
CERTIFICATION	UKCA, CE
WARRANTY	1 year (+ 4 year extended warranty with online registration)
EFFICACY RATING	100lm/W



BRIGHT SOURCE


**BRIGHT SOURCE**
232087**72**
kWh/1000h

2021 No. 1093

BRIGHT SOURCE

110V 2FT ANTI-CORROSIVE FITTING

20W

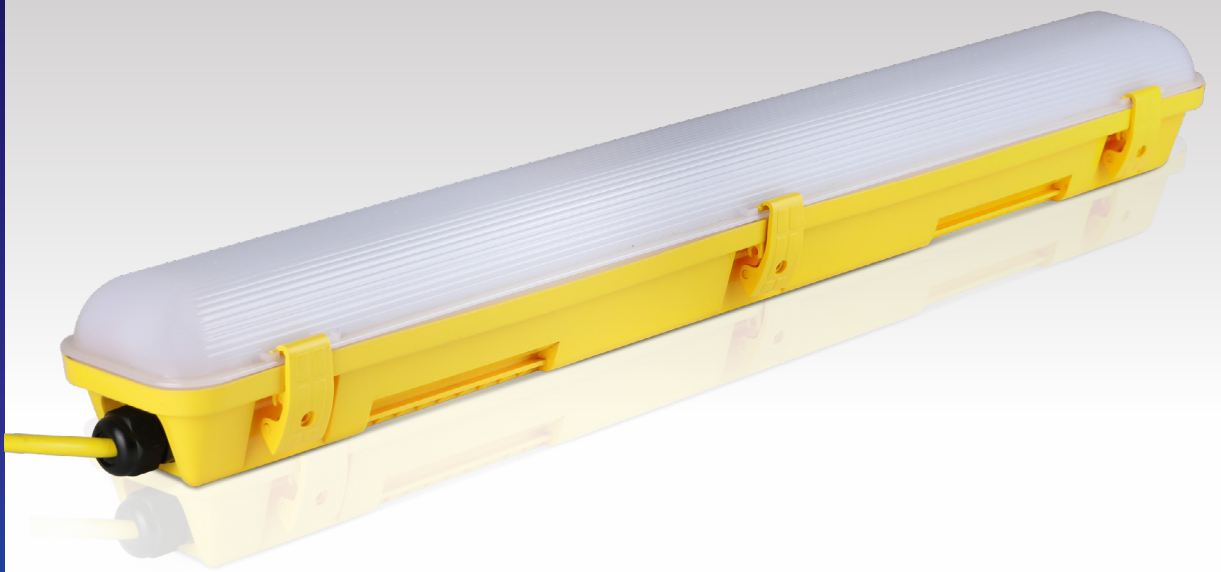

**5
YEAR
WARRANTY**
WITH ONLINE
REGISTRATION

FEATURES:

- IP65 Weather Proof
- 4ft and 5ft sizes are also available
- Available with a Tripod (232148) and a Plasterer's A-Frame (232131)
- High Quality
- Robust and Durable product

APPLICATIONS



CONSTRUCTION



OUTDOOR




WORK SITES

20W

110V 2FT ANTI-CORROSIVE FITTING

Part No.	232094
DESCRIPTION	110V 2ft Anti-Corrosive Fitting
DIMENSIONS	640mm x 82mm x 72mm
BODY COLOUR	Yellow
POWER CONSUMPTION	20W
POWER INPUT	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT/MODES	2200lm
IP RATING	IP65
IK RATING	IK10
BEAM ANGLE	120°
CONSTRUCTION	Polycarbonate
WORKING TEMPERATURE	-20°C to +45°C
LIFETIME (HRS)	50,000
SWITCH CYCLES	15,000
CERTIFICATION	UKCA, CE
WARRANTY	1 year (+ 4 year extended warranty with online registration)
EFFICACY RATING	110lm/W



ADDITIONAL ACCESSORIES

Part No.	232148
DESCRIPTION	2ft Anti-Corrosive with Tripod Available
DIMENSIONS	260mm x 170mm x 1590mm




Part No.	232131
DESCRIPTION	2ft Anti-Corrosive with Plasterer's A-Frame Available
DIMENSIONS	270mm x 310mm x 950mm



BRIGHT SOURCE



BRIGHT SOURCE
232094



20
kWh/1000h




2021 No. 1093

BRIGHT SOURCE

110V 4FT ANTI-CORROSIVE FITTING

25W

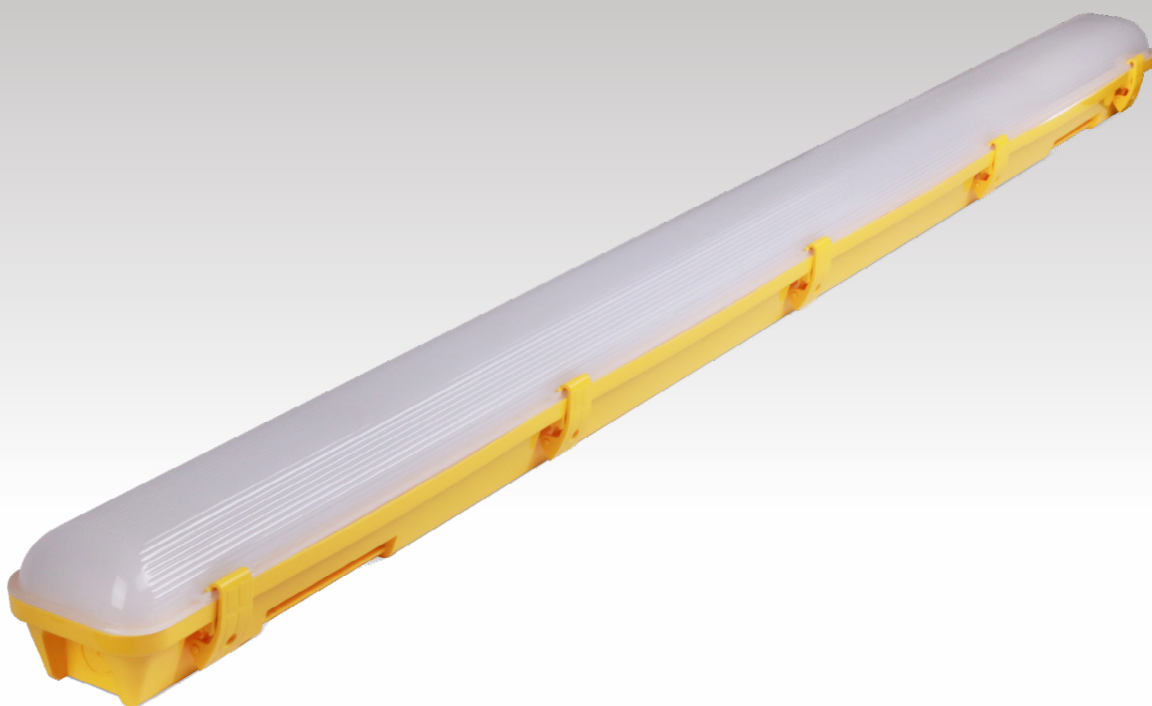

**5
YEAR
WARRANTY**
WITH ONLINE
REGISTRATION

FEATURES:

- IP65 Weather Proof
- 2ft and 5ft sizes are also available
- High Quality
- Robust and Durable Product

APPLICATIONS



CONSTRUCTION



OUTDOOR




WORK SITES

25W

110V 4FT ANTI-CORROSIVE FITTING


Part No.	232100
DESCRIPTION	110V 4ft Anti-Corrosive Fitting
DIMENSIONS	1240mm x 82mm x 72mm
BODY COLOUR	Yellow
POWER CONSUMPTION	25W
POWER INPUT	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT/MODES	2750lm
BEAM ANGLE	120°
IP RATING	IP65
IK RATING	IK10
CONSTRUCTION	Polycarbonate
WORKING TEMPERATURE	-20°C to +45°C
LIFETIME (HRS)	50,000
SWITCH CYCLES	15,000
CERTIFICATION	UKCA, CE
WARRANTY	1 year (+ 4 year extended warranty with online registration)
EFFICACY RATING	110lm/W

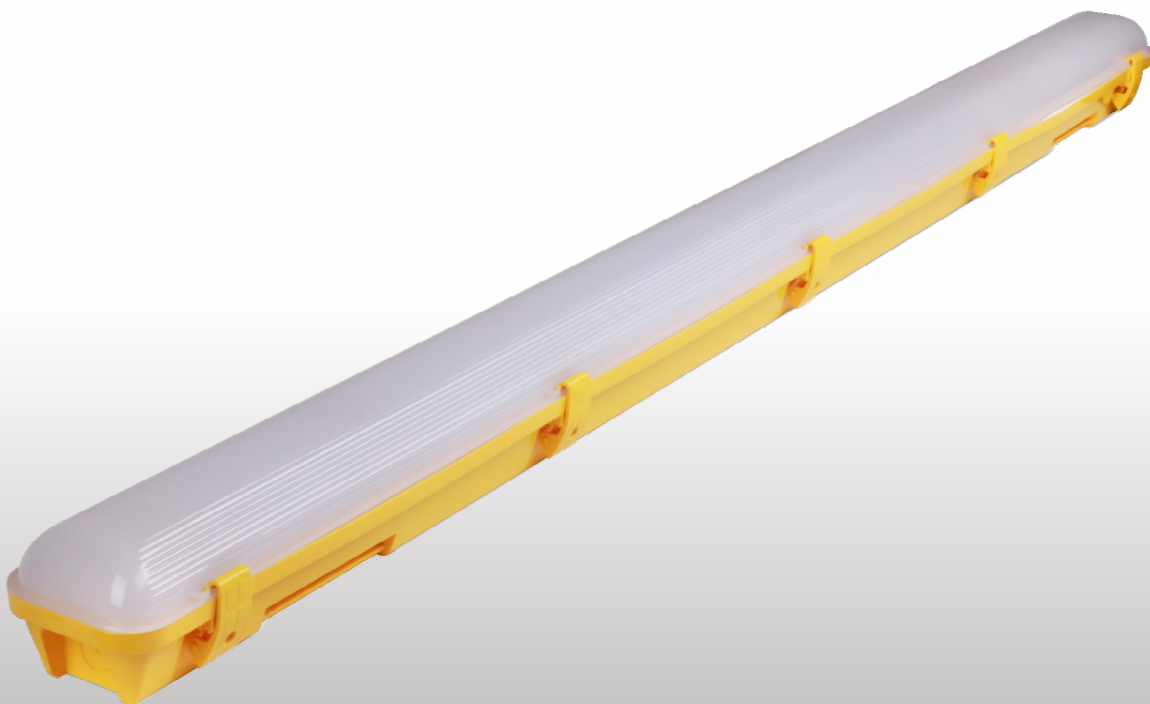

BRIGHT SOURCE



BRIGHT SOURCE
232100



25
kWh/1000h




2021 No. 1093

BRIGHT SOURCE

110V 5FT ANTI-CORROSIVE FITTING

35W

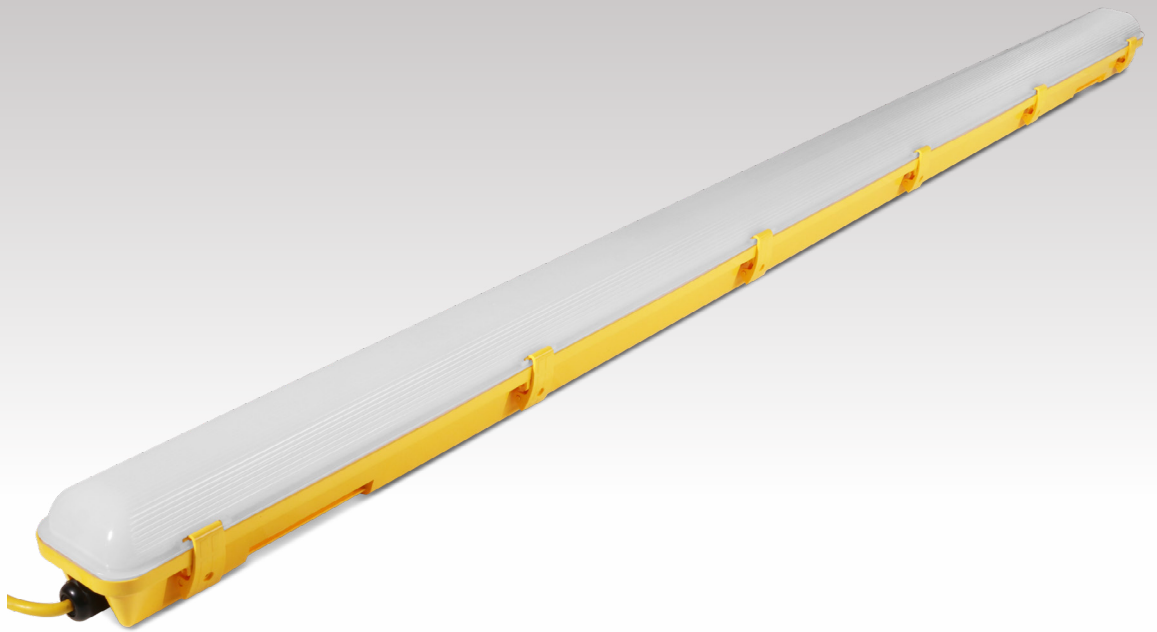

**5
YEAR
WARRANTY**
WITH ONLINE
REGISTRATION

FEATURES:

- IP65 Weather Proof
- 4ft and 2ft sizes are also available
- High Quality
- Robust and Durable Product

APPLICATIONS



CONSTRUCTION



OUTDOOR



WORK SITES

35W


110V 5FT ANTI-CORROSIVE FITTING

Part No.	232117
DESCRIPTION	110V 2ft Anti-Corrosive Fitting
DIMENSIONS	1540mm x 82mm x 73mm
BODY COLOUR	Yellow
POWER CONSUMPTION	35W
POWER INPUT	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT/MODES	3850lm
BEAM ANGLE	120°
IP RATING	IP65
IK RATING	IK10
CONSTRUCTION	Polycarbonate
WORKING TEMPERATURE	-20°C to +45°C
LIFETIME (HRS)	50,000
SWITCH CYCLES	15,000
CERTIFICATION	UKCA, CE
WARRANTY	1 year (+ 4 year extended warranty with online registration)
EFFICACY RATING	110lm/W

BRIGHT SOURCE




BRIGHT SOURCE
232117



35
kWh/1000h



2021 No. 1093

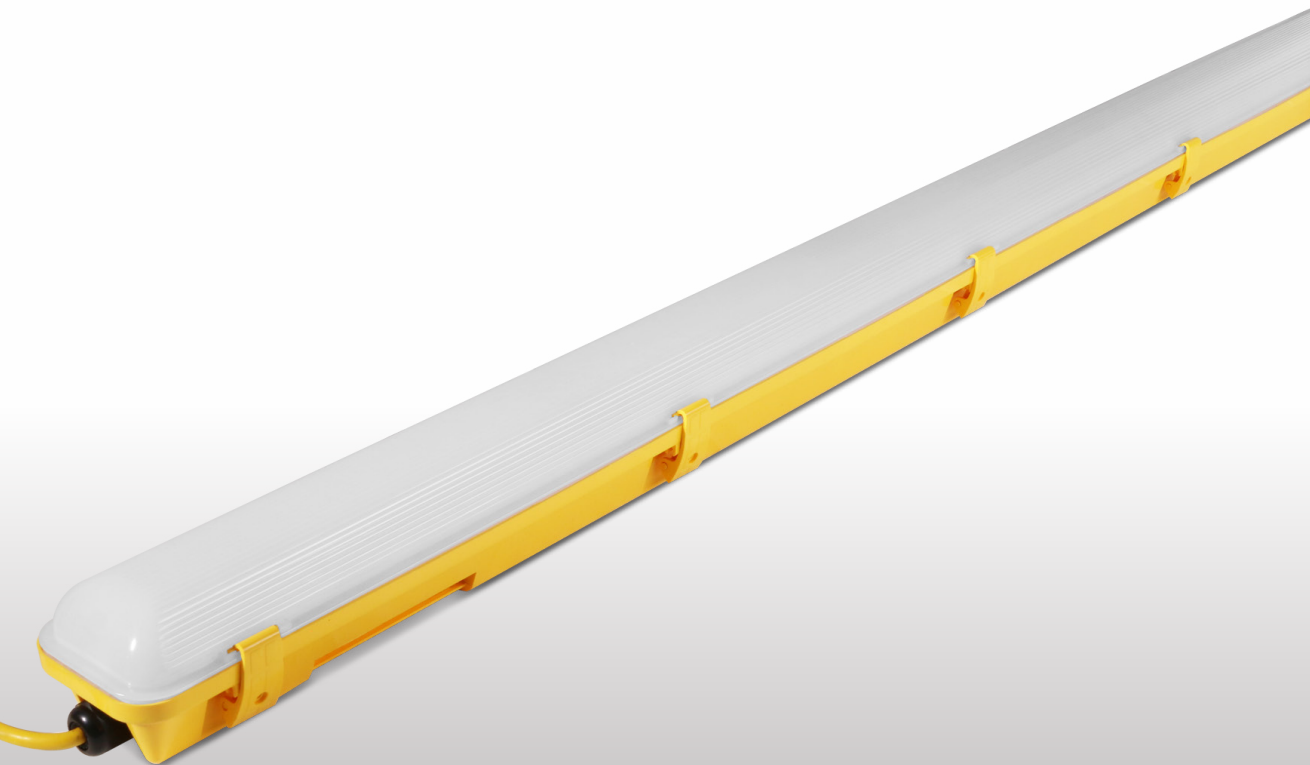

110V PLASTERER'S FOLDING A-FRAME

20W

with 2ft Anti-Corrosive Fitting



FEATURES:

- IP65 Weather Proof
- High Quality
- Robust and Durable Product

5
YEAR
WARRANTY
WITH ONLINE
REGISTRATION

APPLICATIONS



CONSTRUCTION



OUTDOOR



WORK SITES

20W

110V PLASTERER'S FOLDING A-FRAME

with 2ft Anti-Corrosive Fitting


Part No.	232131
DESCRIPTION	110V Plasterer's Folding A-Frame with 2ft Anti-Corrosive Fitting
DIMENSIONS	270mm x 310mm x 950mm
BODY COLOUR	Yellow
POWER CONSUMPTION	20W
POWER INPUT	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT/MODES	2200lm
BEAM ANGLE	120°
IP RATING	IP65
IK RATING	IK10
CONSTRUCTION	Polycarbonate & Steel
WORKING TEMPERATURE	-20°C to +45°C
LIFETIME (HRS)	50,000
SWITCH CYCLES	15,000
CERTIFICATION	UKCA, CE
WARRANTY	1 year (+ 4 year extended warranty with online registration)
EFFICACY RATING	110lm/W



BRIGHT SOURCE



BRIGHT SOURCE
232131



20
kWh/1000h



2021 No. 1093

BRIGHT SOURCE

110V 2FT ANTI-CORROSIVE FITTING

20W

with Tripod



FEATURES:

- IP65 Weather Proof
- High Quality
- Robust and Durable Product

APPLICATIONS



CONSTRUCTION



OUTDOOR



WORK SITES



20W

110V 2FT ANTI-CORROSIVE FITTING

with Tripod


Part No.	232148
DESCRIPTION	110V 2ft Anti-Corrosive Fitting with Tripod
DIMENSIONS	260 x 170 x 1590mm
BODY COLOUR	Yellow
POWER CONSUMPTION	20W
POWER INPUT	100-120V
COLOUR TEMPERATURE	4000K
COLOUR RENDITION (CRI)	Ra >80
LUMEN OUTPUT/MODES	2200lm
BEAM ANGLE	120°
IP RATING	IP65
IK RATING	IK10
CONSTRUCTION	Polycarbonate & Steel
WORKING TEMPERATURE	-20°C to +45°C
LIFETIME (HRS)	50,000
SWITCH CYCLES	15,000
CERTIFICATION	UKCA, CE
WARRANTY	1 year (+ 4 year extended warranty with online registration)
EFFICACY RATING	110lm/W



BRIGHT SOURCE



BRIGHT SOURCE
232148



20
kWh/1000h



2021 No. 109