


# ALL IN ONE LED DOWNLIGHT

5W  
-  
8W

## New All in One Downlight with Easy-fit Plug'n'Play Connector

Energy efficient LED illumination for all settings with driver on a flexible connection, great for tight spaces.



### Bezel Included as Standard White

5 additional bezel finishes are available to purchase separately:




ANTIQUÉ BRASS  
[230700]




BLACK  
[230687]



POLISHED CHROME  
[230694]



BRUSHED CHROME  
[230755]



ANTHRACITE GREY  
[230779]

(Bezel images for illustration purpose only.)

### 6 Impressive Features, 1 Amazing Downlight

1. Dimmable
2. Fire-Resistant 30/60/90 minutes
3. 3-hour emergency version available
4. IP65 Rated with Bezel
5. Switchable Wattage 5W-8W
6. 4 Colour Temperatures

**5  
YEAR  
WARRANTY**  
WITH ONLINE  
REGISTRATION

### FEATURES:

- New 5W/8W downlight added to the range
- Plug'n'Play as standard
- 4CCT - colour temperature changing switch (2700K, 3000K, 4000K, 6000K)
- Bezel included as standard - White
- Easy to install
- Switch the bezels after installation
- Trusted, stylish design from the All in One range which includes the 8W/10W fire-rated downlight and the Tilt 8W/10W

### APPLICATIONS



COMMERCIAL



HOME &  
RESIDENTIAL


5W  
-  
8W

# ALL IN ONE LED DOWNLIGHT

New insulation cover with easy fit Plug'n'Play connector

<b>Part No.</b>	<b>230670</b>
DESCRIPTION	5W/8W All in One Downlight 4CCT
DIMENSIONS	90 x 45 x 45mm (Excluding driver)
CUT OUT	65mm diameter
POWER CONSUMPTION	5W or 8W Selectable
POWER FACTOR	0.9
COLOUR TEMPERATURE	2700K (Extra Warm White) / 3000K (Warm White) / 4000K (Cool White) / 6000K (Daylight White)
COLOUR RENDITION (CRI)	Ra >80
LUMINENCE FLUX	460-540lm (5W), 720-840lm (8W)
IP RATING	IP65 (with Bezel only)
CONSTRUCTION	Aluminum / Polycarbonate
FIRE RESISTANT	BS476-21 30/60/90 minutes
BEAM ANGLE	60°
DIMMABLE	Yes
LIFETIME	54,000hrs
WORKING TEMPERATURES	-25°C to +45°C
CERTIFICATION	CE, UKCA, RoHS
WARRANTY	1 year (+ 4 years extended warranty with online registration)
EFFICACY RATING	100lm/W

## Space Requirements

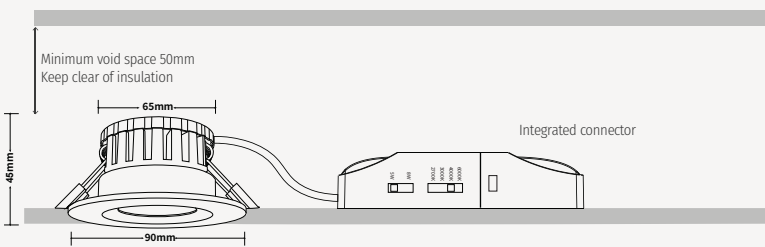

Energy efficient LED illumination for all settings with a driver on a flexible connection, great for tight spaces!

## EXCELLENT PERFORMANCE FROM THE **ALL IN ONE** RANGE




**8W/10W Switch**  
230465



**8W/10W Switch Tilt**  
230489



**Bright Source**  
230670

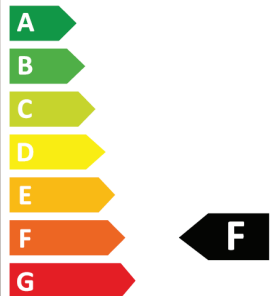

**8**  
kWh/1000h



2021 No. 109

**BRIGHT SOURCE**